



PHITS I38 - Assembly manual

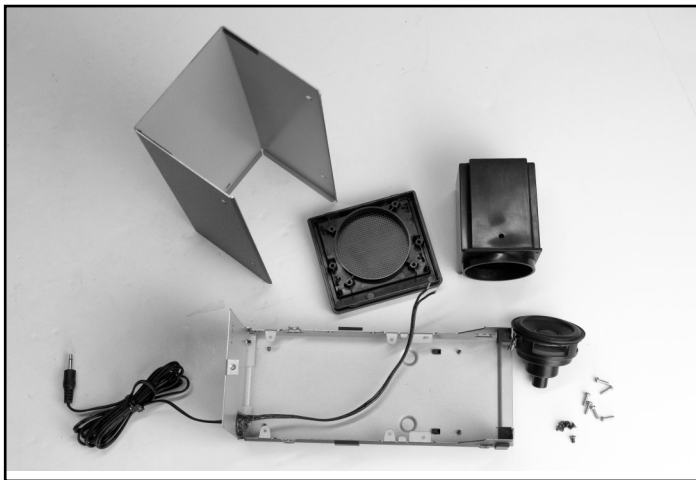


1. Remove both the metal cover and the front panel.
2. Cut the plastic clamp that holds the cable.
3. Separate the speaker enclosure from the front panel by removing the four screws that hold it.
4. Separate the speaker enclosure by removing the rear Allen screw.
5. Cut the cable as close as possible to the speaker so that it remains as long as possible.




6. On the front panel, place the gasket with the white side facing in and screw the new speaker using the four screws.

7. Place plates B and BK.
8. Sold the cables again respecting polarity (The cable marked with a long dash line is the negative pole).
9. Fix the front panel with the two screws.

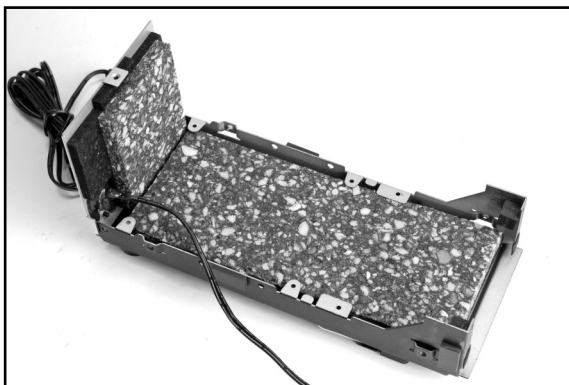

10. Place plates L and R so that they fit between plate B and the metal wall of the base.

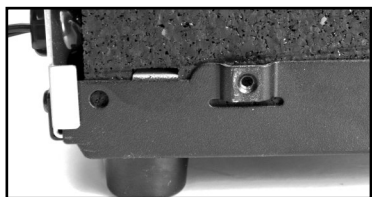

11. Place the Basotect cube and the T plate so that they fit with the BK, L and R plates.
12. Replace the metal cover and fix it with the screws.

Enjoy your new sound!

